


ACCESSORIES

STEEL RESERVOIR

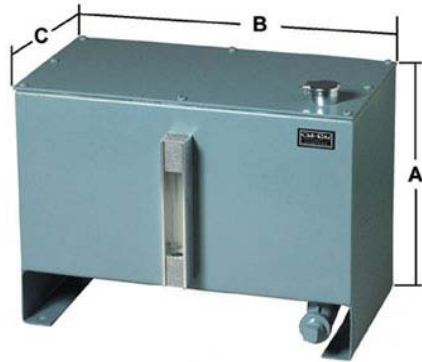

SELECTION CHART

Catalog Number	Capacity	Dimension (Inch)		
		A	B	C
B-770-1	1 Gal.	10	6	7-1/2
B-770-2	2 Gal.	10	10	7-1/2
B-770-3	3 Gal.	10	14	7-1/2
B-774-2	5 Gal.	11-1/2	16	10
B-773-4	10 Gal.	15	20	12

Specifications:

- Tank - Steel, Painted
- Cover - Steel, Painted
- Level Gage - Aluminum
- Filler Cap - Steel, Plated

ACRYLIC RESERVOIR



SELECTION CHART

Dimension (Inches)	

Catalog Number	Capacity	A	B	C
B-2886-1	1 Qt.	6-3/4	6-5/16	5-3/4
B-2886-2	1/2 Gal.	10-1/4	6-5/16	5-3/4
B-2886-3	1 Gal.	15-1/4	6-5/16	5-3/4
B-2886-4	2 Gal.	28-1/4	6-5/16	5-3/4

Specifications:

- Reservoir - Clear Acrylic
- Covers - Aluminum Alloy
- Mtg. Brackets - Aluminum Alloy
- Seals - Buna N (other seal materials available)
- Filter Optional
- 1/8 NPT Female Outlet

ROUND POLYCARBONATE RESERVOIR



SELECTION CHART


Catalog Number	Capacity	Dimension (Inches)	
		A	B
B-1748-17	2-1/2 Oz.	2	4-1/4
B-1748-18	5 Oz.	2-7/8	4-1/4
B-1748-19	9 Oz.	2-7/8	5-1/2
B-1748-20	1 Pt.	3-5/8	6-13/16
B-1748-21	1 Qt.	3-5/8	10-3/16
B-1748-22	1/2 Gal.	5	11-1/16

Specifications:

- Polypropylene Cap
- Polycarbonate Reservoir

- Shank - Steel, Plated
- Temperature 225° F Max.
- Seals - Buna N (other seal materials available)
- 5/8 - 18 Mounting Thread, 1/8 NPT Female Outlet

1/2 GALLON PRESSURIZED
GREASE RESERVOIR

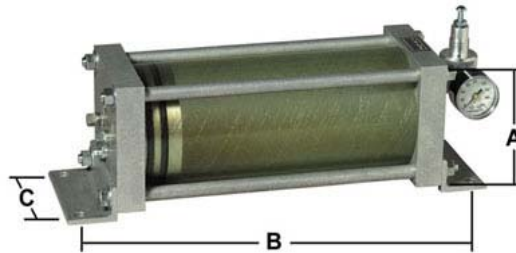

This reservoir uses pressurized air, acting on a piston, to pressurize the grease. The unit is supplied with a built in air regulator and pressure gauge for easy adjustment. The reservoir is designed for 100 PSIG operating pressure. A safety relief valve, on the grease side, is set at 120 PSIG to prevent over-pressurization. Filling the unit through the built in grease fitting is quick and easy. The unit has (3) 1/4" NPT outlets.

SELECTION CHART

Catalog Number	Capacity	Thread Size	Dimension (inches)		
			A	B	C
B-3109-1	1/2 Gal.	1/4 Female N.P.T.	4-13/16	14-1/2	3-5/8

Specifications:

- Temperature - 120° F. Maximum
- Pressure - 100 PSI Maximum



CYCLE TIMER .6 SECONDS TO 24 HOURS
Catalog No. B-2685-4

Dual adjustments permit accurate settings for most applications. A chart for switch positioning is printed on timer for ease in selecting time ranges. 110 Volts, 60 HZ standard.

**3-WAY AIR SOLENOID VALVE**

Catalog No. B-2684-1

(1/8" female NPT) (Specify voltage & frequency)

This valve is used to cycle air operated PurgeX® pumps. It is wired to a timer or other electrical signal to operate the PurgeX®.

**AIR REGULATOR**

Catalog No. B-1308-11

(1/8" female NPT)

Adjustable 0-130 PSI used to control air pressure.

**FLOW SIGHT**

Catalog No. A-715-1


(1/8" female NPT)

Sights provide a visual confirmation of flow.



AIR GAUGE
0 TO 160 PSI
Catalog No. B-1307-13

REMOTE SPRAY NOZZLES



Catalog No. B-2720-1



Catalog No. B-2720-2

Miniature spray nozzles for remote mounting. Features separate connections for air and liquid. External mix nozzle permits exact control of spray. Barb fittings for 1/4 OD x 1/8 ID polyurethane tubing.



3- WAY MECHANICAL
AIR VALVE
Catalog No. B-2876-1
(1/8" female NPT) (Normally closed)

This valve is used to cycle air operated PurgeX® pumps. It is operated by cam or another mechanical device.

NYLON BRUSHES



A-2048-1



A-2256-5




A-2256-2

SELECTION CHART

Catalog Number	Description	Size
A-2048-1	Flat Brush w/mtg. Bracket	2-1/4 x 3/8
A-2256-5	Flat Brush w/o Bracket	2-1/4 x 3/8
A-2256-1	Round Brush	1/4 Dia.
A-2256-2	Round Brush	5/8 Dia.
A-2256-3	Round Brush	1 Dia.
A-2256-4	Round Brush	1-1/2 Dia.

TUBING AND FITTINGS

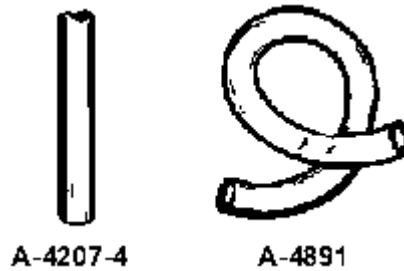


Catalog Number	Description	PSI
A-4207-4	1/4 OD Copper Tubing	1000
A-4891-8	1/4 OD Polyurethane Tubing	125
A-4891-9	1/4 OD Nylon Tubing	250

FITTINGS FOR POLYURETHANE TUBING



Catalog Number	Description
A-4177-45	Straight, 1/8 NPT x 1/4 Tubing
A-4177-55	Elbow, 1/8 NPT x 1/4 Tubing
A-4177-43	Tee 1/4 Tubing

FITTINGS FOR NYLON TUBING

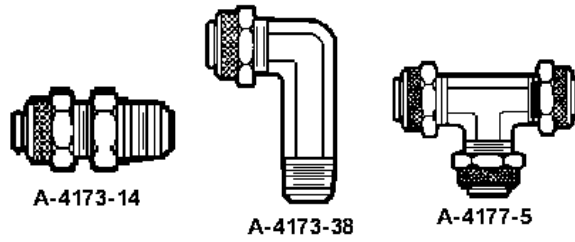

Catalog Number	Description
A-4173-14	Straight, 1/8 NPT x 1/4 Tubing
A-4173-38	Elbow, 1/8 NPT x 1/4 Tubing
A-4177-5	Tee 1/4 Tubing

FITTINGS FOR COPPER TUBING



Catalog Number	Description
A-4173-3	Straight, 1/8 NPT x 1/4 Tubing
A-4173-31	Elbow, 1/8 NPT x 1/4 Tubing
A-4177-1	Tee 1/4 Tubing

[RETURN TO PURGEX® PAGE](#)